

XV.BL.C9

Portable Counter offering backlit graphic, locking storage and internal storage with shelf.

Specifications & Features

Assembled Size= 60"w x 22"d x 38.5"h

Product Weight= 75lbs

Shipping Weight In Case= 110lbs

Weight Limit= 150lbs


Case Required= 48.25.T

Set-up Time= 15 Minutes

Light Source= LED Light Blanket

Power Required= 10amps

Laminate Options

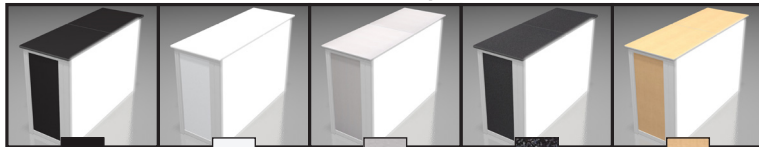



Jett Black
Crystal

Designer
White


Silver Alu
Metal X

Graphite
Nebula


Fusion
Maple

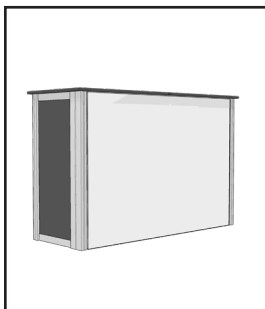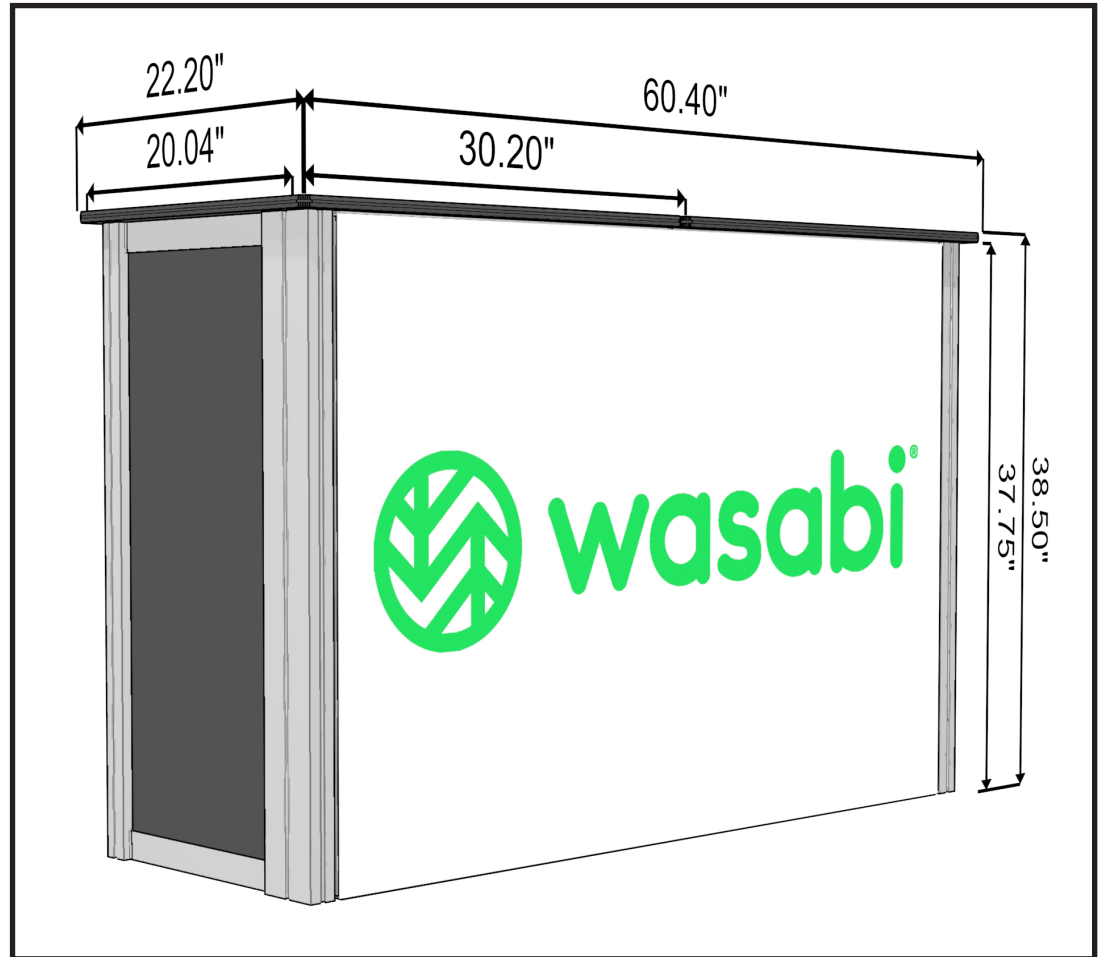


Left

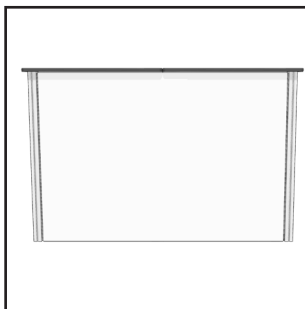


Front

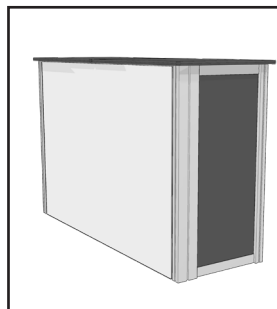


Right

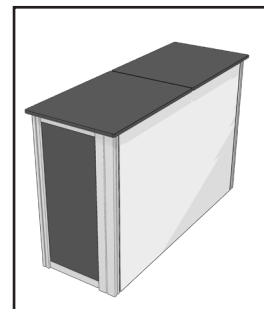

ISO

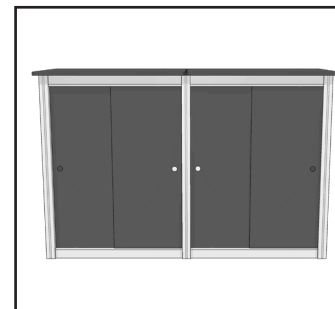

Back


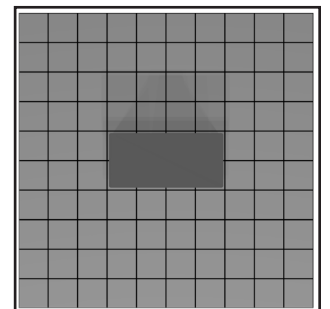


Top-Down

Connections & Tool List

(C)



(D)

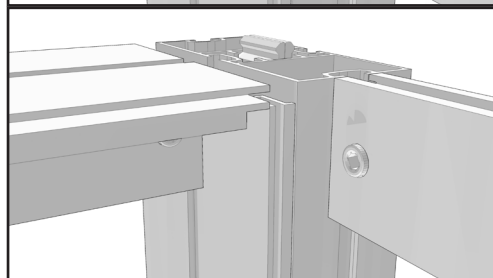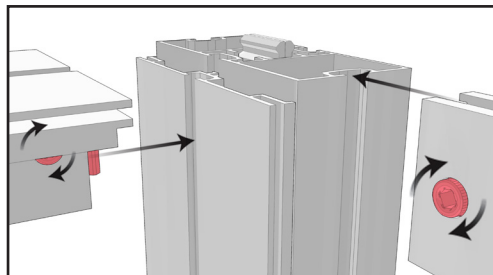



(G)

(H)

(J)

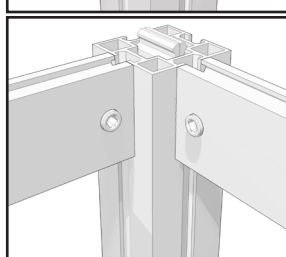
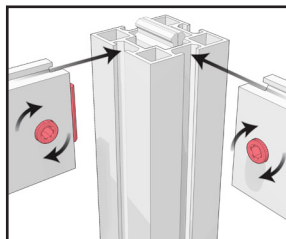


(I)

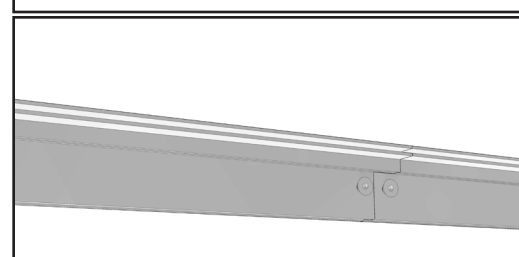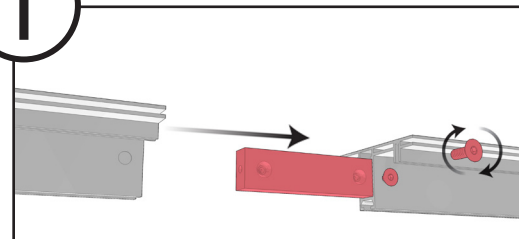

(A)




(B)

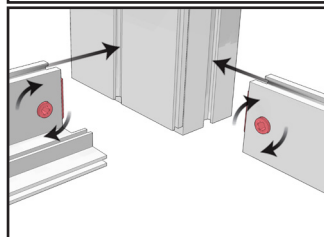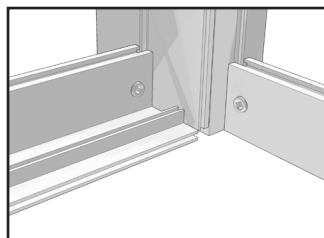


(E)

(F)

(J)

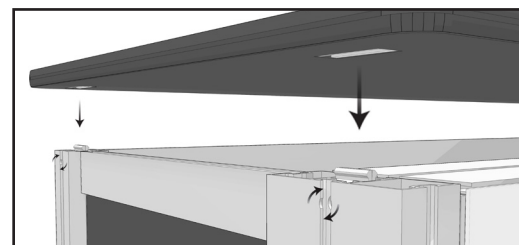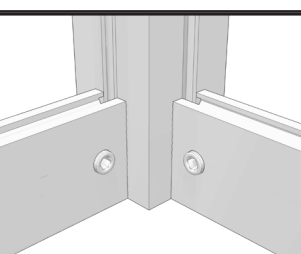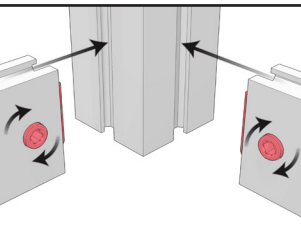

Exploded View

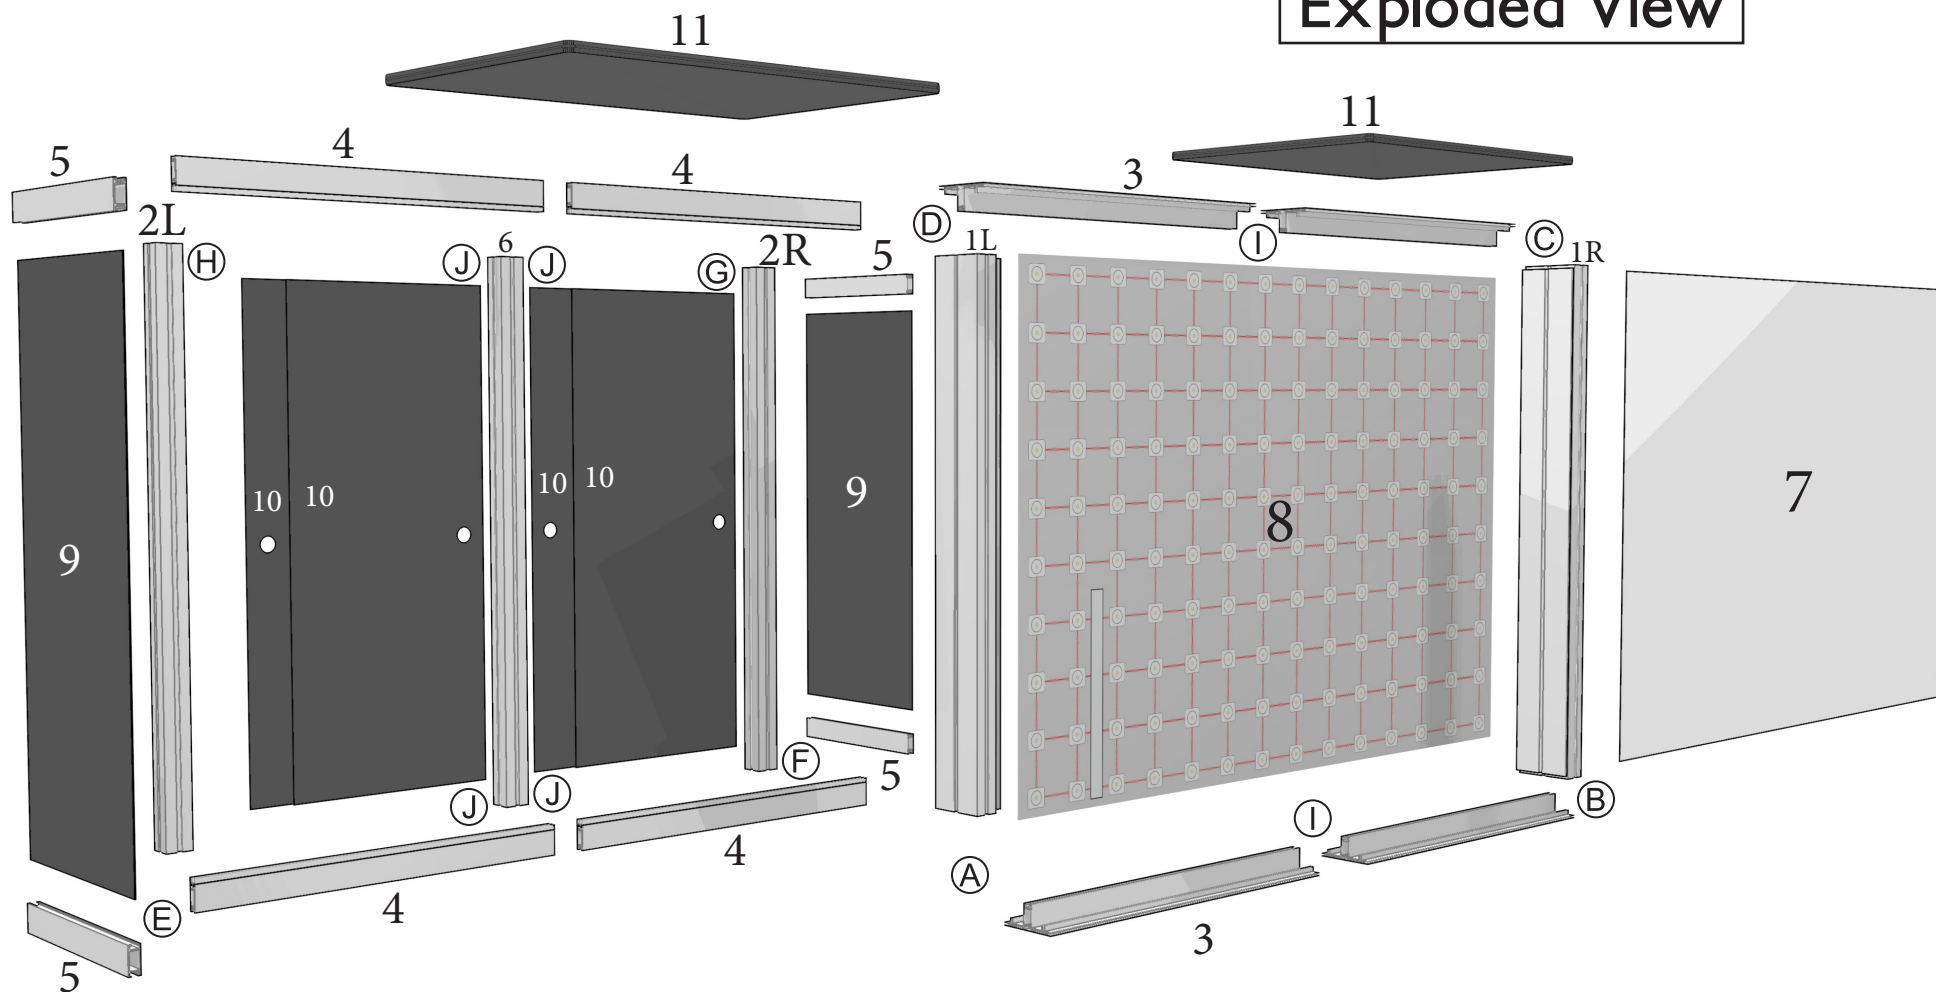

****NOTE****

LABELS face IN

Connections are **CIRCLED** and **LETTERED**

Parts List

1L.) x1 - L=37 3/4" Front Left Column
1R.) x1 - L=37 3/4" Front Right Column
2L.) x1 - L=37 3/4" Back Left Column
2R.) x1 - L=37 3/4" Back Right Column
3.) x2 - 2-piece L=53 5/8" Front Crossbars
4.) x4 - L=26 1/4" Back Crossbars

5.) x4 - L=14" Side Crossbars
6.) x1 - L=37 3/4" Vertical Support
7.) x1 - SEG
8.) x1 - Light Blanket
9.) x2 - Side Panels
10.) x4 - Back Doors



11.) x2 - Tops
12.) x4 - CBX44
13.) x20 - CBX42
14.) x2 - XV.InLine.Long.1

Instructions : XV.BL.C9


Step by Step

STEP 1.)

Attach bottom crossbars(3,5,4) to columns(1L,2L,1R,2R,6) tighten with 5mm.

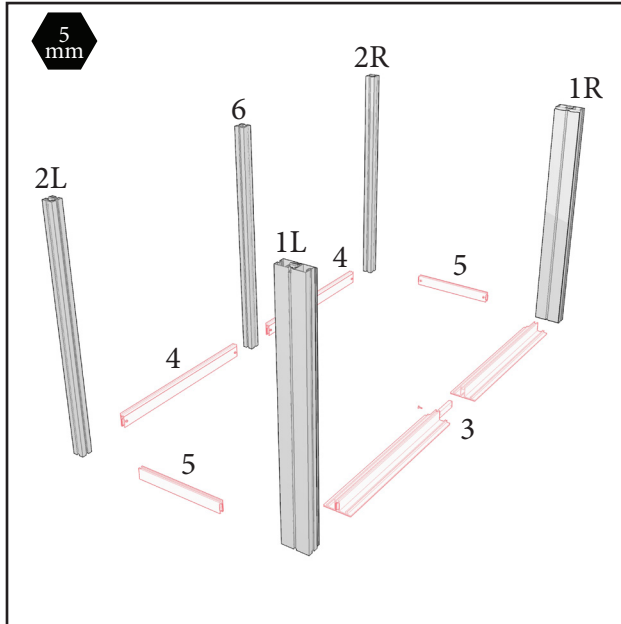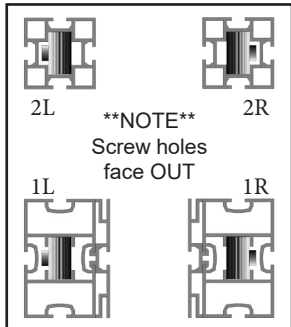


STEP 2.) Drop in doors(10) and side panels(9) into channel.

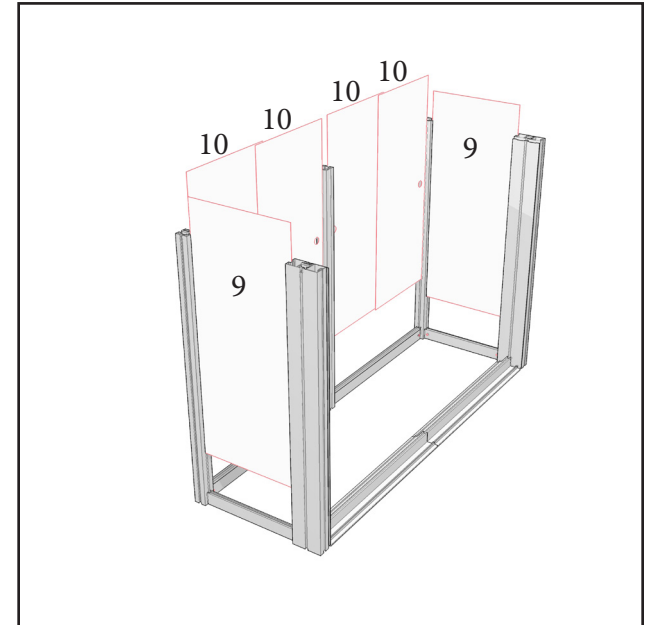


STEP 3.)


Attach top crossbars(3,5,4) to columns(1L,2L,1R,2R,6) tighten with 5mm.

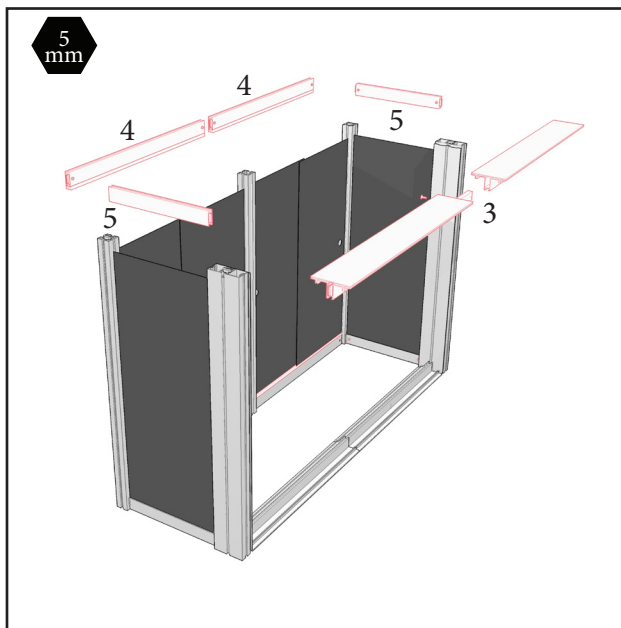



STEP 4.) Attach SEG(7) & light blocker(8). See SEG Installation Instructions for details.

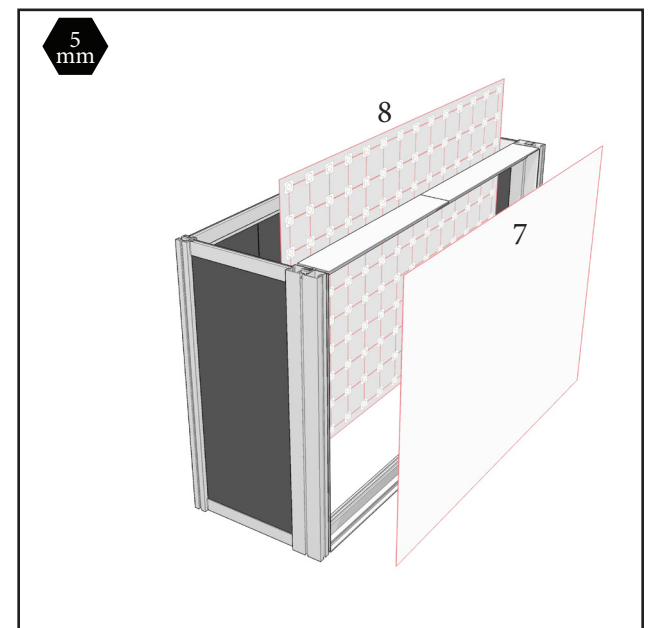

STEP 5.) Drop top(11) onto columns tighten with 4mm to secure.

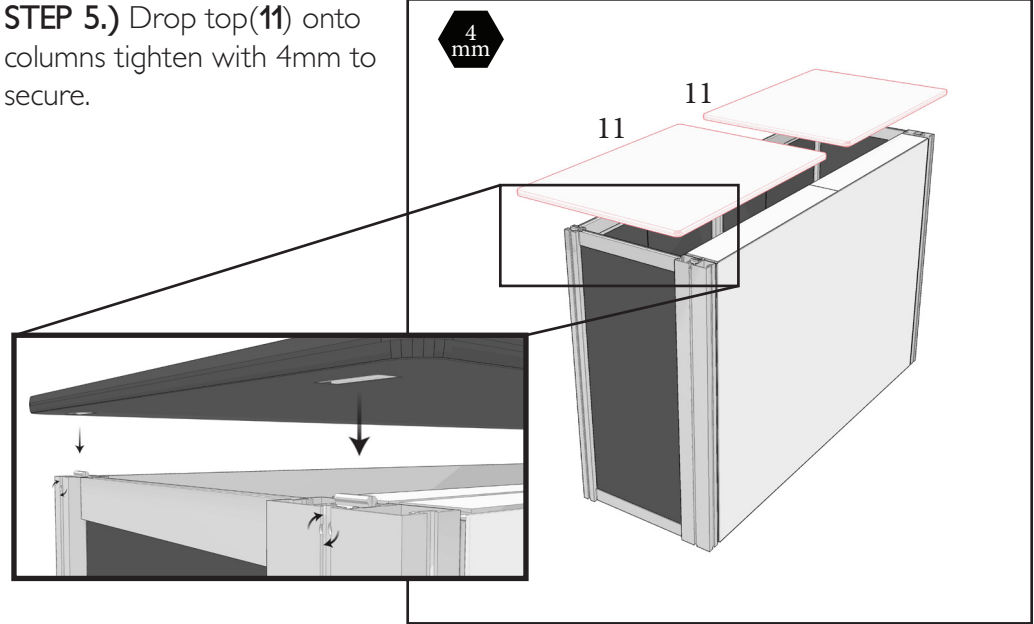


COMPLETE

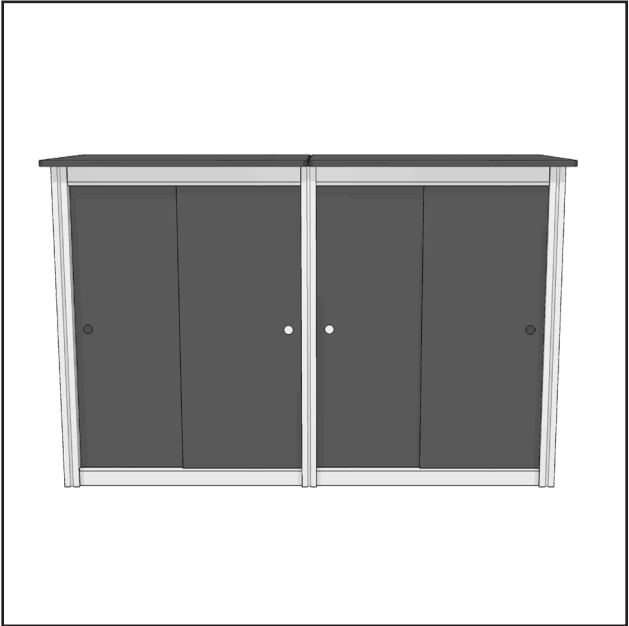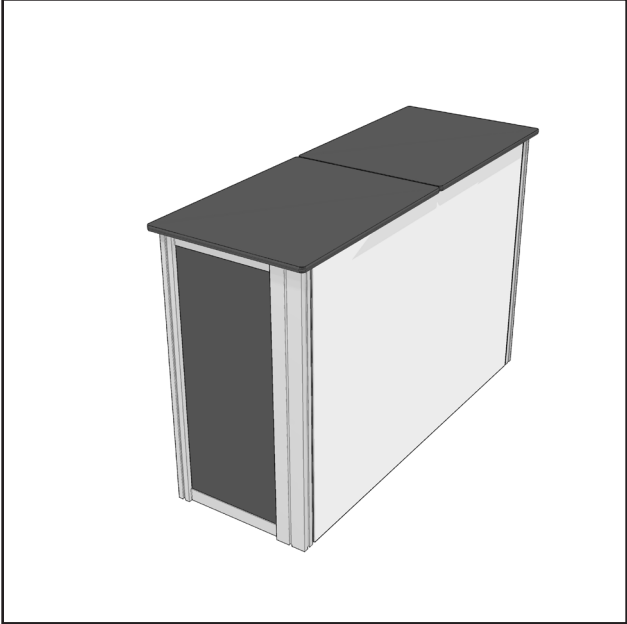


Instructions : SEG


STEP1.) Attach SEG corners.

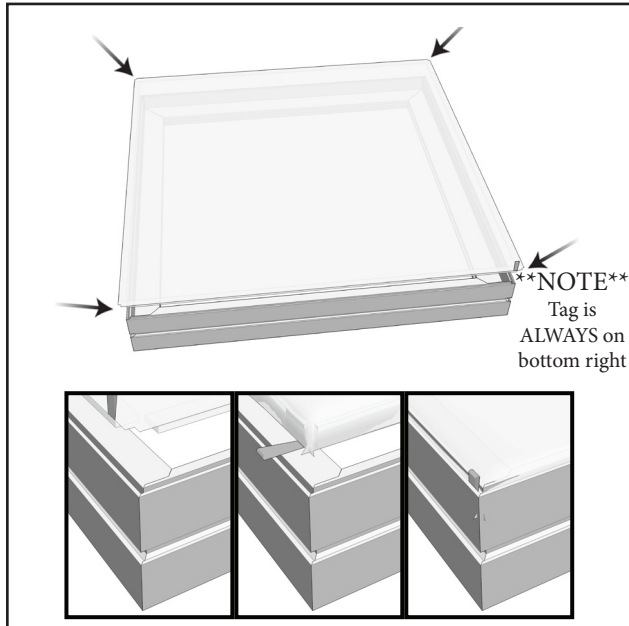

STEP3.) Attach SEG midway points.

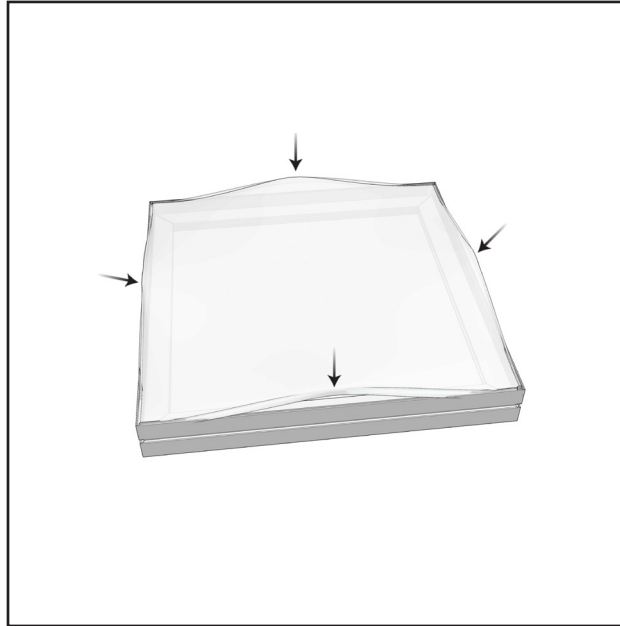

COMPLETE

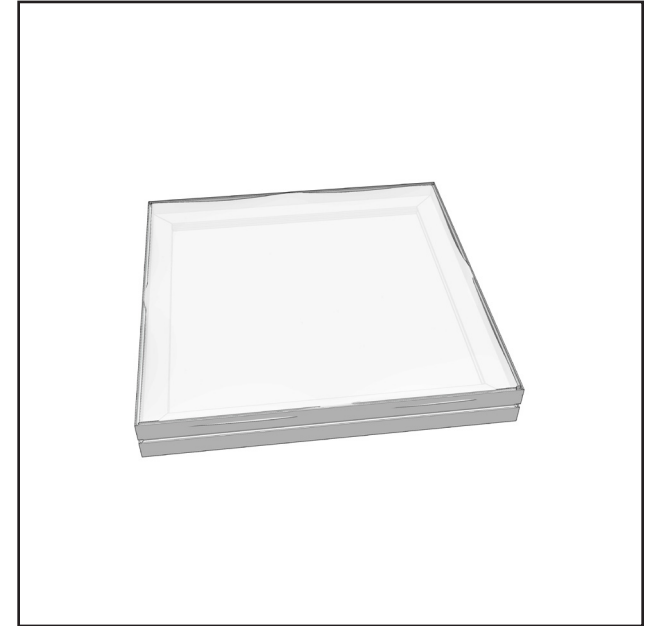

Graphic Dimensions : XV.BL.C9

